

Product	C-0727-SMA-2A
Description	2-Way Power Divider (Wilkinson)
Frequency (MHz)	698 - 2700
Input Port Number	1
Output Port Number	2
Split Loss (dB)	3.0
Insertion Loss (dB)	≤ 0.5
VSWR	≤ 1.25
Port Isolation (dB)	≥ 20
Phase Balance Max. (deg)	≤ 2.5
Amplitude Imbalance Max. (dB)	≤ 0.2
Average Power (W)	50
Impedance (Ω)	50
Connector	SMA Female
Color	Black
Application	Outdoor
Temperature (°C)	-35 - + 65
Relative Humidity	5% - 95%





Contact us today!


(973) 394-1719

sales@etisupport.net

etisupport.net

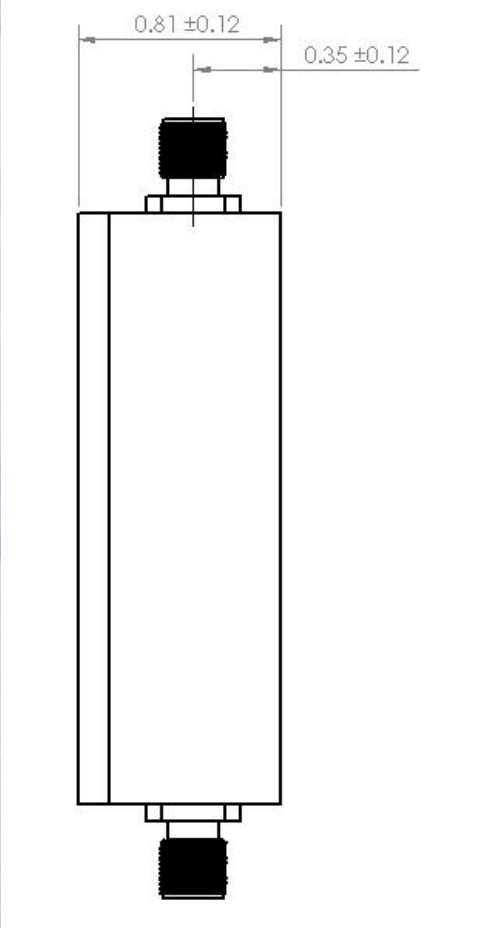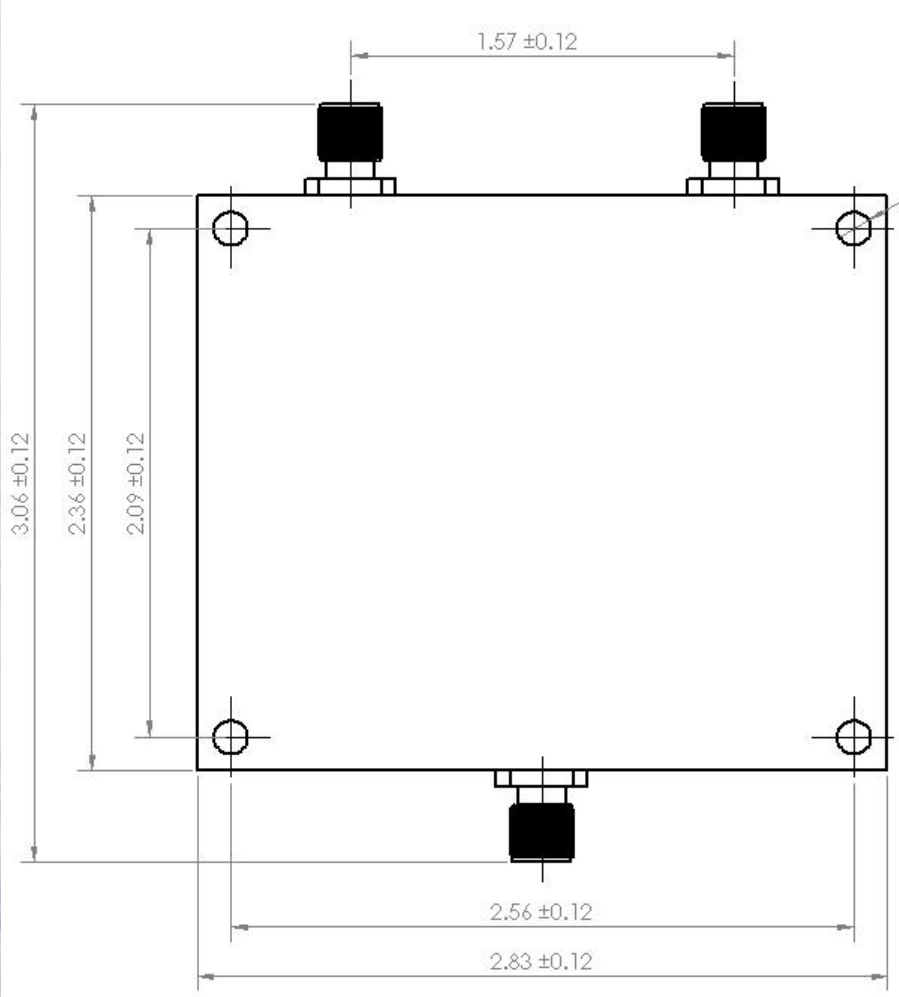

VSWR

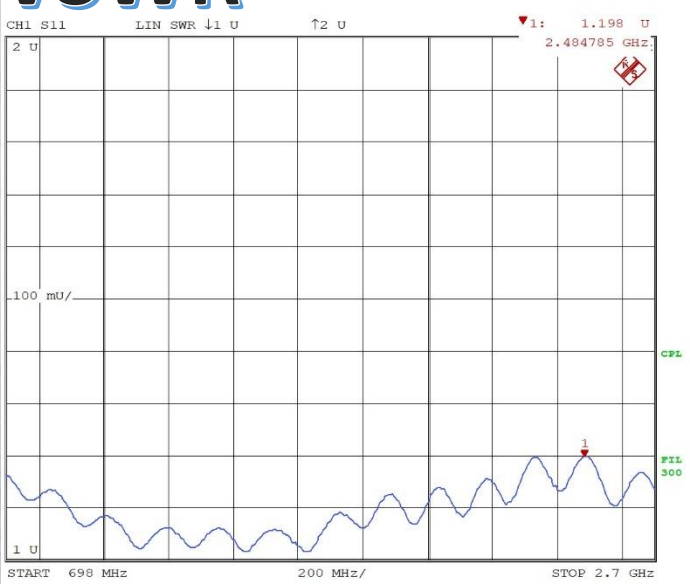

ISOLATION

